

| <i>Technical data Easy</i> | <i>M.E.</i> | <i>EASY 507 BANCO</i> | <i>EASY 510 BANCO</i> | <i>EASY 507</i> | <i>EASY 510</i> |
|----------------------------------------------------------|-------------|-------------------------------------------------------------|-----------------------|-------------------|-------------------|
| Dimensions belt ExB (measured from the roll's center) | mm | 495x847 | 495x1000 | 495x850 | 495x1000 |
| Dimensions on work AxCx Dx F | mm | 1694x650x195x960 | 2000x650x195x960 | 2174x1156x880x965 | 2480x1156x880x965 |
| Dimensions at rest FxGxH | mm | 960x590x890 | 960x590x1041 | 960x1500x1575 | 965x1723x1800 |
| Packaging dimensions | cm | 115x80x145H | | 115x120x180 | 115x120x195 |
| Net weight machine | kg | 120 | 120 | 186 | 200 |
| Weight machine + packaging | kg | 155 | 162 | 240 | 249 |
| Rated power supply | kW | 0,55 | 0,55 | 0,75 | 0,75 |
| Supply voltage | V | 220 / 380 / 415 / 440 / 460 /480 | | | |
| Frequency | Hz | 50 -60 | | | |
| Electrical phases | | 1/3 | 1/3 | 1/3 | 1/3 |
| Belt speed | cm/s | 60 cm/s (standard) - 12-60 cm/s con variatore energy saving | | | |


| <i>Technical data Easy</i> | <i>U.M.</i> | <i>EASY 610</i> | <i>EASY 612</i> | <i>EASY 614</i> | <i>EASY 616</i> |
|----------------------------------------------------------|-------------|----------------------------------------------------|--------------------|--------------------|--------------------|
| Dimensions belt ExB (measured from the roll's center) | mm | 595x1000 | 595x1200 | 595x1400 | 595x1600 |
| Dimensions on work AxCx Dx F | mm | 2480x1156x880x1065 | 2880x1156x880x1065 | 3280x1156x880x1065 | 3680x1156x880x1065 |
| Dimensions at rest FxGxH | mm | 1065x1723x1800 | 1065x1911x1989 | 1065x2100x2178 | 1065x2290x2368 |
| Packaging dimensions | cm | 115x120x195 | 115x120x180 | 115x120x180 | |
| Net weight machine | kg | 205 | 210 | 215 | 226 |
| Weight machine + packaging | kg | 280 | 285 | 290 | 295 |
| Rated power supply | kW | 0,75 | | | |
| Supply voltage | V | 220 / 380 / 415 / 440 / 460 /480 | | | |
| Frequency | Hz | 50 -60 | | | |
| Electrical phases | | 1/3 | 1/3 | 1/3 | 1/3 |
| Belt speed | cm/s | 60 cm/s (standard) - 12-60 cm/s with energy saving | | | |

Tekno Stamap reserves the right to make technical changes at any time and without notice.

Easy & Tablette

Sheets perfectly done

MADE IN ITALY

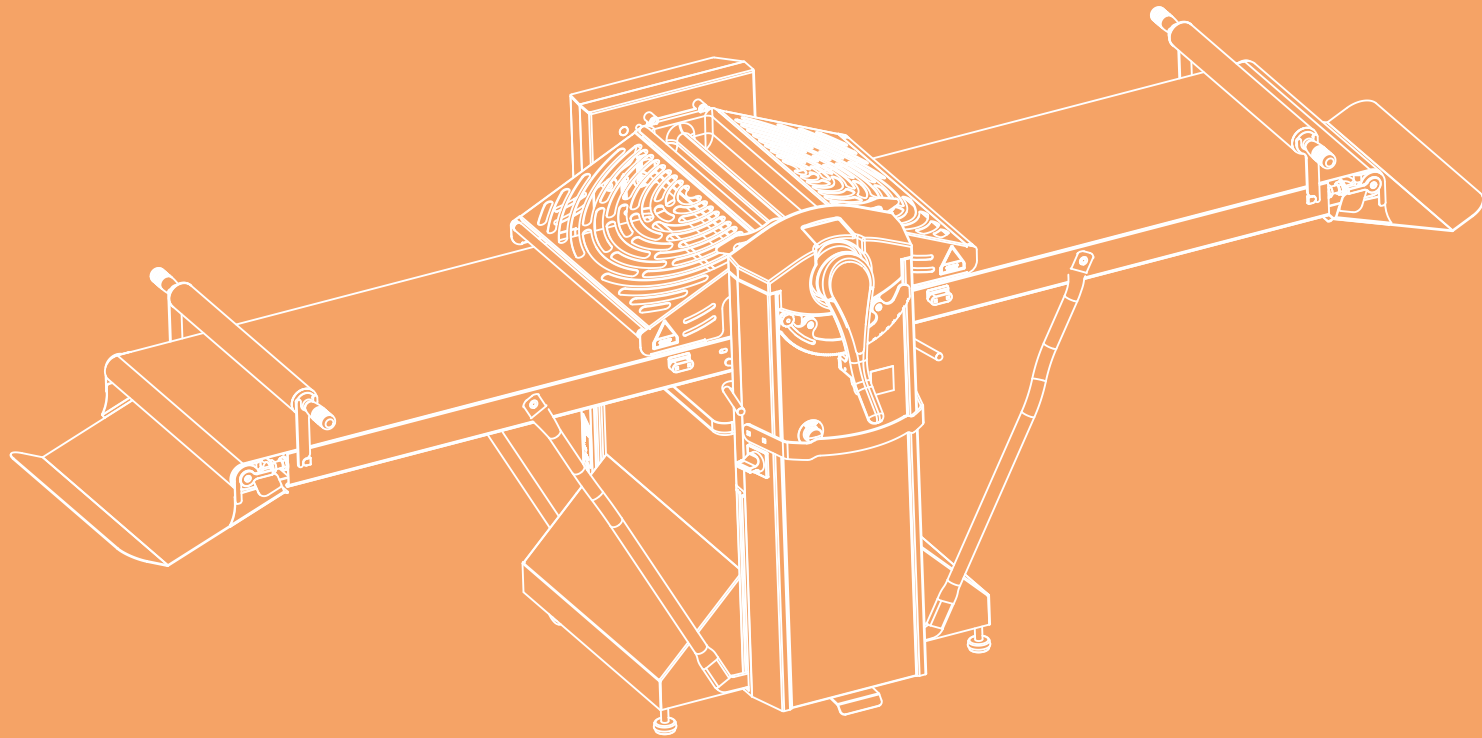

Tekno Stamap®

Via Tretti Marotti, 4
36040 Grisignano di Zocco
Vicenza _ Italy

T.: 0039 0444 - 414 735
F.: 0039 0444 414 719

www.teknostamap.eu
info@teknostamap.com

Tekno Stamap

Technology boosting creativity

www.teknostamap.eu


Easy & Tablette

Manual sheeters

SHEETS PERFECTLY DONE

The EASY and TABLETTE dough sheeters have been specifically designed for small laboratories that need an easy, reliable, economic and quality product. The small overall dimensions and the possibility of always folding the machine at the end of each day of use allow you to increase flexibility in your laboratories without compromising on quality and precision in processing. Furthermore, with the new display, reading the cylinder opening quota will be simple and immediate even for the less experienced.

With TABLETTE, the ultra-compact dimensions allow the use also in the kitchens of restaurants and hotels, where this machine fits perfectly, managing to sheet the dough with professional quality and keeping the maximum overall dimensions under the meter.

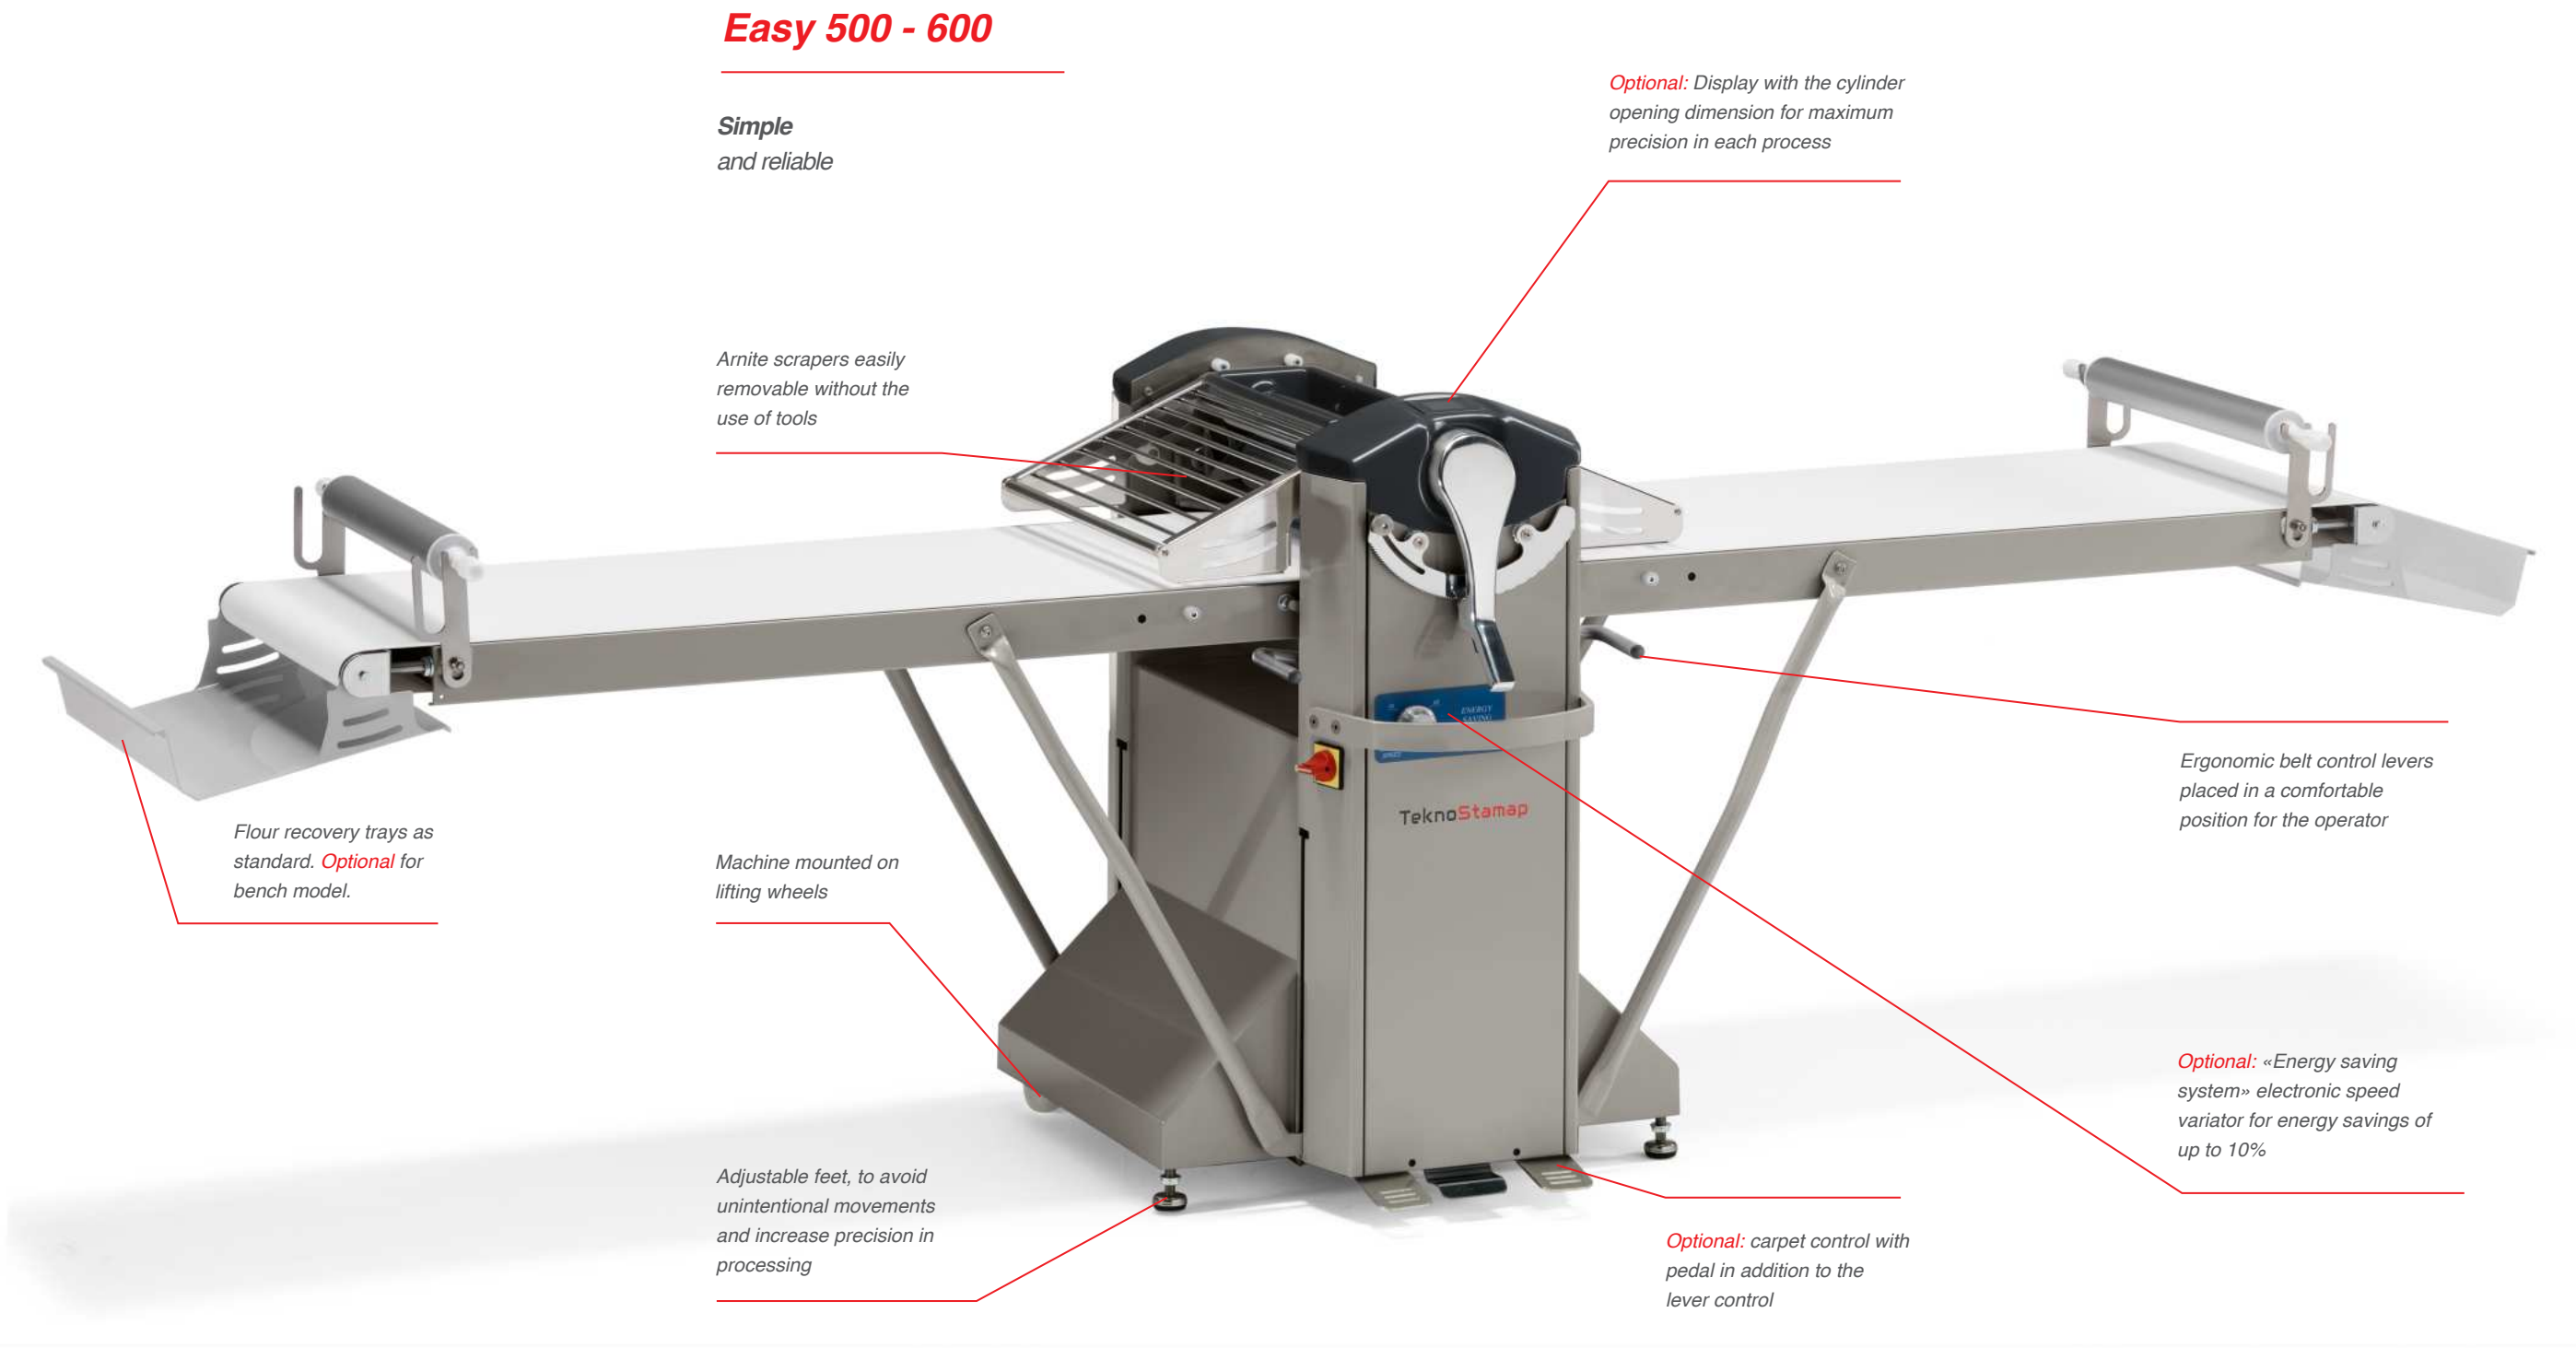

Tablette

Ultra compact

Our "pocket" dough sheeter for small productions, ideal for restaurant and hotel kitchens that do not want to give up quality with little space.

| Technical data | U.M. | Tablette |
|----------------------------|------|--------------|
| Useful lamination space | mm | 500 |
| Flour tray capacity | Kg | 3 |
| Working dimensions AxBxC | mm | 930x973x428 |
| Support base dimension DxE | mm | 290x653 |
| Dimensions at rest | mm | 362x973x428H |
| Packaging dimensions | cm | 115x80x100H |
| Net weight machine | Kg | 87 |
| Weight machine + packaging | Kg | 105 |
| Rated electrical power | kW | 0,37 |
| Supply Voltage | V | 220 - 380 |
| Frequency | Hz | 50 - 60 |
| Electrical phases | | 1/3 |



Ideal for sheeting even reduced thicknesses of dough



BENCH MODEL

The bench model of the EASY range maintains all the qualities of the machine with base combined with a smaller footprint.



CUTTING DEVICE

Optional: Dispositivo di taglio a rulli disponibile per i modelli con lunghezza nastro di 1400mm e 1600mm.

